



where improvement is an unending feature....

CATALOGUE

Evershine Rubbers (P) Ltd.
(An ISO 9001: 2015 Company)

VPO Daburji, GT Road, Amritsar- 143006 (Punjab) India

E-mail: info@evershinehose.com

Website: www.evershinehose.com

POWERMAX®

Contractor Grade Air Hose

Technical Specifications

Tube

High Strength, Versatile, Oil Mist Resistance Rubber

Cover

Weather & Ozone Resistant Synthetic Rubber Blend

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules

Pressure

W.P: 200PSI, 250PSI, 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)

Oil Resistance

Exceeds RMA Class 'C' Oil Resistance


Accessories

Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap

Advantages

Heavy Quality Contractor Grade Hose, Very Good Mechanical Properties

High Burst Strength, Stays Flexible in - 30° F to 190° F

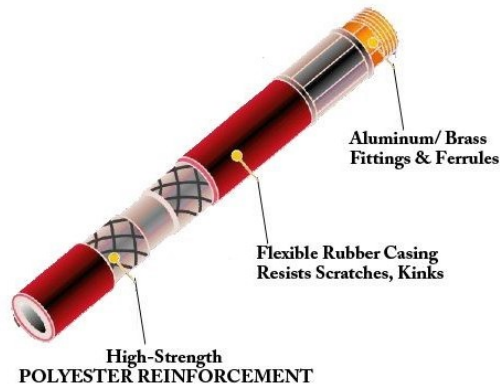

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

Powermax Air Hose With Fitting

POWERMAX AIR HOSE CONTRACTOR GRADE WITH FITTINGS							
PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
POWAH140025	1/4"	300	20	25'	1/4" NPT	3 : 1	8
POWAH140050	1/4"	300	20	50'	1/4" NPT	3 : 1	6
POWAH140100	1/4"	300	20	100'	1/4" NPT	3 : 1	4
POWAH380025	3/8"	300	20	25'	1/4" NPT	3 : 1	8
POWAH380050	3/8"	300	20	50'	1/4" NPT	3 : 1	6
POWAH380100	3/8"	300	20	100'	1/4" NPT	3 : 1	2
POWAH120025	1/2"	300	20	25'	3/8" NPT	3 : 1	6
POWAH120050	1/2"	300	20	50'	3/8" NPT	3 : 1	4
POWAH120100	1/2"	300	20	100'	3/8" NPT	3 : 1	2
POWAH516025	5/16"	300	20	25'	1/4" BSP	3 : 1	8
POWAH516050	5/16"	300	20	50'	1/4" BSP	3 : 1	6
POWAH516100	5/16"	300	20	100'	1/4" BSP	3 : 1	2

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
POWHAH140025	1/4"	300	20	25'	1/4" NPT	3 : 1	8
POWHAH140050	1/4"	300	20	50'	1/4" NPT	3 : 1	6
POWHAH140100	1/4"	300	20	100'	1/4" NPT	3 : 1	4
POWHAH380025	3/8"	300	20	25'	1/4" NPT	3 : 1	8
POWHAH380050	3/8"	300	20	50'	1/4" NPT	3 : 1	6
POWHAH380100	3/8"	300	20	100'	1/4" NPT	3 : 1	2

Powermax Air Hose Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
POWAH14006	1/4	6.3	21.0	2.0	300
POWAH51608	5/16	8.0	21.0	2.0	300
POWAH38095	3/8	9.5	21.0	2.0	300
POWAH12125	1/2	12.5	21.0	2.0	300
POWAH58016	5/8	16.0	21.0	2.0	300
POWAH34019	3/4	19.0	21.0	2.0	300
POWAH10025	1	25.0	21.0	2.0	300
POWAH14006	1/4	6.3	14.2	1.4	200
POWAH51608	5/16	8.0	14.2	1.4	200
POWAH38095	3/8	9.5	14.2	1.4	200
POWAH12125	1/2	12.5	14.2	1.4	200
POWAH58016	5/8	16.0	14.2	1.4	200
POWAH34019	3/4	19.0	14.2	1.4	200
POWAH10025	1	25.0	14.2	1.4	200
OIL (OIL RESIST)	CUSTOM	CUSTOM	21.0	2.0	300

PREMIER™

Diy Grade Air Hose

Technical Specifications

Tube

Oil Mist Resistance Rubber

Cover

High Strength Rubber

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass

Ferrules

Pressure

W.P: 150PSI, 200PSI, 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)

Oil Resistance

Exceeds RMA Class 'C' Oil Resistance

Advantages

Economical, Versatile Air Hose, Good Mechanical Properties, High burst Strength



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green



Application Guide:-	Excellent			Very Good		Good	
	Light Weight	Cold Weather Flexibility	Resists Twisting	Non Marring			
	█	█	█	█	█	█	█

Multiple Fittings and packing options available.

Premier Air Hose Diy Grade With Fitting

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
PRDYAH140025	1/4"	300	20	25'	1/4" NPT	3 : 1	8
PRDYAH140050	1/4"	300	20	50'	1/4" NPT	3 : 1	6
PRDYAH140100	1/4"	300	20	100'	1/4" NPT	3 : 1	4
PRDYAH380025	3/8"	300	20	25'	1/4" NPT	3 : 1	8
PRDYAH380050	3/8"	300	20	50'	1/4" NPT	3 : 1	6
PRDYAH380100	3/8"	300	20	100'	1/4" NPT	3 : 1	2
PRDYAH120025	1/2"	300	20	25'	3/8" NPT	3 : 1	6
PRDYAH120050	1/2"	300	20	50'	3/8" NPT	3 : 1	4
PRDYAH120100	1/2"	300	20	100'	3/8" NPT	3 : 1	2
PRDYAH516025	5/16"	300	20	25'	1/4" BSP	3 : 1	8
PRDYAH516050	5/16"	300	20	50'	1/4" BSP	3 : 1	6
PRDYAH516100	5/16"	300	20	100'	1/4" BSP	3 : 1	2

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
PRDYAH140025	1/4"	300	20	25'	1/4" NPT	3 : 1	8
PRDYAH140050	1/4"	300	20	50'	1/4" NPT	3 : 1	6
PRDYAH140100	1/4"	300	20	100'	1/4" NPT	3 : 1	4
PRDYAH380025	3/8"	300	20	25'	1/4" NPT	3 : 1	8
PRDYAH380050	3/8"	300	20	50'	1/4" NPT	3 : 1	6
PRDYAH380100	3/8"	300	20	100'	1/4" NPT	3 : 1	2

Premier Air Hose Diy Grade Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
PRDYAH14006	1/4	6.3	21.0	2.0	300
PRDYAH51608	5/16	8.0	21.0	2.0	300
PRDYAH38095	3/8	9.5	21.0	2.0	300
PRDYAH12125	1/2	12.5	21.0	2.0	300
PRDYAH58016	5/8	16.0	21.0	2.0	300
PRDYAH34019	3/4	19.0	21.0	2.0	300
PRDYAH10025	1	25.0	21.0	2.0	300
PRDYAH14006	1/4	6.3	14.2	1.4	200
PRDYAH51608	5/16	8.0	14.2	1.4	200
PRDYAH38095	3/8	9.5	14.2	1.4	200
PRDYAH12125	1/2	12.5	14.2	1.4	200
PRDYAH58016	5/8	16.0	14.2	1.4	200
PRDYAH34019	3/4	19.0	14.2	1.4	200
PRDYAH10025	1	25.0	14.2	1.4	200



Wrapped Air Hose

Technical Specifications

Tube

High Strength, Versatile, Oil Mist Resistance Rubber

Cover

Wrap Finish: Abrasion, Weather & Ozone Resistant EPDM Rubber

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules

Pressure

W.P: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)

Oil Resistance

Exceeds RMA Class 'C' Oil Resistance

Accessories

Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap

Advantages

Special Design for Professionals, Lighter & More Flexible, Extended Service Life, Exceptional Adhesion due to the Wrap Process, Stays Flexible in - 30° F to +190° F.



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green



Aluminum/ Brass
Fittings & Ferrules

Wrapped Finish gives more
flexibility Extended Service
Life & Better Adhesion

High-Strength
POLYESTER REINFORCEMENT

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

Evershine Wrapped Air Hose With Fitting

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
EWAH380025	3/8"	300	20	25'	1/4" NPT	3 : 1	8
EWAH380050	3/8"	300	20	50'	1/4" NPT	3 : 1	6
EWAH380100	3/8"	300	20	100'	1/4" NPT	3 : 1	2
EWAH120025	1/2"	300	20	25'	3/8" NPT	3 : 1	6
EWAH120050	1/2"	300	20	50'	3/8" NPT	3 : 1	4
EWAH120100	1/2"	300	20	100'	3/8" NPT	3 : 1	2

Evershine Wrapped Air Hose Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
EWAH14006	1/4	6.3	21.0	2.0	300
EWAH51608	5/16	8.0	21.0	2.0	300
EWAH38095	3/8	9.5	21.0	2.0	300
EWAH12125	1/2	12.5	21.0	2.0	300
EWAH58016	5/8	16.0	21.0	2.0	300
EWAH34019	3/4	19.0	21.0	2.0	300
EWAH10025	1	25.0	21.0	2.0	300

EVER

Ever Class 'A' Oil Resistance Air

Technical Specifications

Tube

High Strength, Oil Mist Resistance Nitrile Rubber EVER Class 'A' Oil Resistance

Cover

Synthetic Rubber Blend EVER Class 'A' Oil Resistance

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules

Pressure

W.P: 200PSI, 250PSI, 300PSI Exceeds RMA 4:1 Safety Factor *

Accessories

Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap

Advantages

High Quality Auto-Shop hose, Excellent Oil Resistance, Good Mechanical properties, High Burst Strength



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.



Farm & Contractor Water/ Garden Hose

Technical Specifications

Tube

High Strength, Versatile, Oil Mist Resistance Rubber

Cover

Smooth; Abrasion, Weather & Ozone Resistant EPDM Rubber; Several Finishes available

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules

Pressure

100:300PSI, 150:500PSI* (Max. Working Pressure: Min. Burst Pressure)

Oil Resistance

Exceeds RMA Class 'C' Oil Resistance

Accessories


Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap

Advantages

Heavy Duty for Farm, Ranch & Industrial use, Excellent Mechanical Properties, High Burst Strength, Handles Hot Water upto 180F, Stays Flexible in -40° F to 190°F



SIZES(IDs)
1/2" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

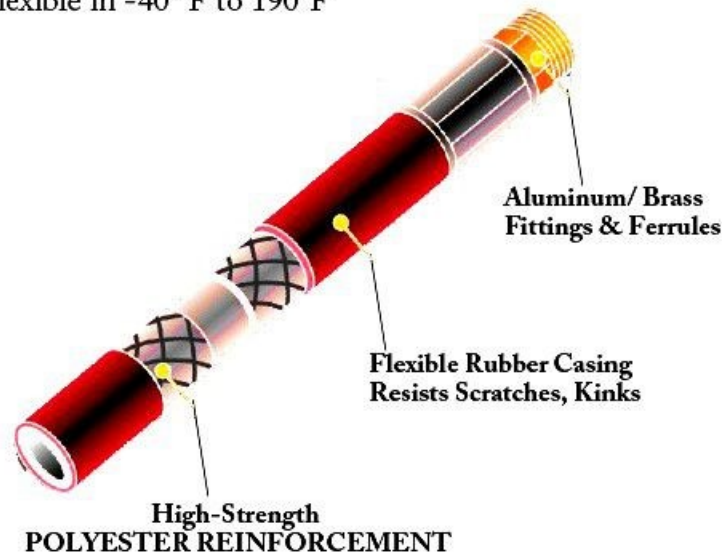

Aluminum/ Brass Fittings & Ferrules

Flexible Rubber Casing Resists Scratches, Kinks

High-Strength POLYESTER REINFORCEMENT

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

Evershine Water / Garden Hose with Fitting

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
EWGH580025	5/8"	500	35	25'	3/4" N.H.	3 : 1	4
EWGH580050	5/8"	500	35	50'	3/4" N.H.	3 : 1	4
EWGH580100	5/8"	500	35	100'	3/4" N.H.	3 : 1	2
EWGH340025	3/4"	500	35	25'	3/4" N.H.	3 : 1	4
EWGH340050	3/4"	500	35	50'	3/4" N.H.	3 : 1	3
EWGH340100	3/4"	500	35	100'	3/4" N.H.	3 : 1	1

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
EWGH120025	1/2"	300	20	25'	3/4" N.H.	3 : 1	4
EWGH120050	1/2"	300	20	50'	3/4" N.H.	3 : 1	4
EWGH120100	1/2"	300	20	100'	3/4" N.H.	3 : 1	2
EWGH580025	5/8"	300	20	25'	3/4" N.H.	3 : 1	4
EWGH580050	5/8"	300	20	50'	3/4" N.H.	3 : 1	4
EWGH580100	5/8"	300	20	100'	3/4" N.H.	3 : 1	2
EWGH340025	3/4"	300	20	25'	3/4" N.H.	3 : 1	4
EWGH340050	3/4"	300	20	50'	3/4" N.H.	3 : 1	3
EWGH340100	3/4"	300	20	100'	3/4" N.H.	3 : 1	1

Evershine Water / Garden Hose with Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
EWGH12125	1/2	12.5	10.2	1	145
EWGH58016	5/8	16.0	10.2	1	145
EWGH34019	3/4	19.0	10.2	1	145
EWGH10025	1	25.0	10.2	1	145
EWGH12125	1/2	12.5	7.0	0.7	100
EWGH58016	5/8	16.0	7.0	0.7	100
EWGH34019	3/4	19.0	7.0	0.7	100
EWGH10025	1	25.0	7.0	0.7	100

POWERMAX[®]

Commercial Grade Water/ Garden Hose

Techical Specifications

Tube

High Strength, Oil Mist Resistance Rubber

Cover

Weather & Ozone Resistant Synthetic Rubber Blend; Several Finishes available

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules

Pressure

100:300PSI, 150:500PSI* (Max. Working Pressure: Min. Burst Pressure)

Oil Resistance


Exceeds EVER Class 'C' Oil Resistance

Accessories

Bend-Restrictor Sleeve to prevent damage near ends .

Advantages

Ideal for Home & Commercial use, Very Good Mechanical Properties, High Burst Strength, Handles Hot Water upto 180F, Stays Flexible in -30° F to 190°F

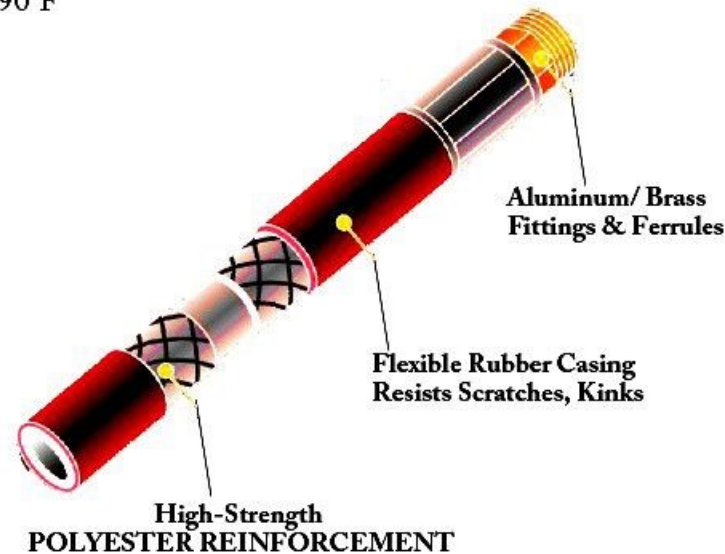

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

Powermax Water / Garden Hose Commercial Grade with Fitting

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
PCWGH580025	5/8"	500	35	25'	3/4" N.H.	3 : 1	4
PCWGH580050	5/8"	500	35	50'	3/4" N.H.	3 : 1	4
PCWGH580100	5/8"	500	35	100'	3/4" N.H.	3 : 1	2
PCWGH340025	3/4"	500	35	25'	3/4" N.H.	3 : 1	4
PCWGH340050	3/4"	500	35	50'	3/4" N.H.	3 : 1	3
PCWGH340100	3/4"	500	35	100'	3/4" N.H.	3 : 1	1

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
PCWGH120025	1/2"	300	20	25'	3/4" N.H.	3 : 1	4
PCWGH120050	1/2"	300	20	50'	3/4" N.H.	3 : 1	4
PCWGH120100	1/2"	300	20	100'	3/4" N.H.	3 : 1	2
PCWGH580025	5/8"	300	20	25'	3/4" N.H.	3 : 1	4
PCWGH580050	5/8"	300	20	50'	3/4" N.H.	3 : 1	4
PCWGH580100	5/8"	300	20	100'	3/4" N.H.	3 : 1	2
PCWGH340025	3/4"	300	20	25'	3/4" N.H.	3 : 1	4
PCWGH340050	3/4"	300	20	50'	3/4" N.H.	3 : 1	3
PCWGH340100	3/4"	300	20	100'	3/4" N.H.	3 : 1	1

Powermax Water / Garden Hose Commercial Grade with Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
PCWGH12125	1/2	12.5	10.2	1	145
PCWGH58016	5/8	16.0	10.2	1	145
PCWGH34019	3/4	19.0	10.2	1	145
PCWGH10025	1	25.0	10.2	1	145
PCWGH12125	1/2	12.5	7.0	0.7	100
PCWGH58016	5/8	16.0	7.0	0.7	100
PCWGH34019	3/4	19.0	7.0	0.7	100
PCWGH10025	1	25.0	7.0	0.7	100

PREMIER™

Water/Garden Hose Diy Grade

Technical Specifications

Tube

Oil Mist Resistance Rubber

Cover

High Strength Rubber; Several Finishes available

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass

Ferrules

Pressure

100:300PSI, 150:500 PSI (Max. Working Pressure: Min.burst Pressure)



Accessories

Bend-Restrictor Sleeve to prevent damage near ends

Advantages

Economical General Purpose Water / Garden Hose, Good Mechanical

Properties, High burst Strength, Handles Hot Water up to 160 F

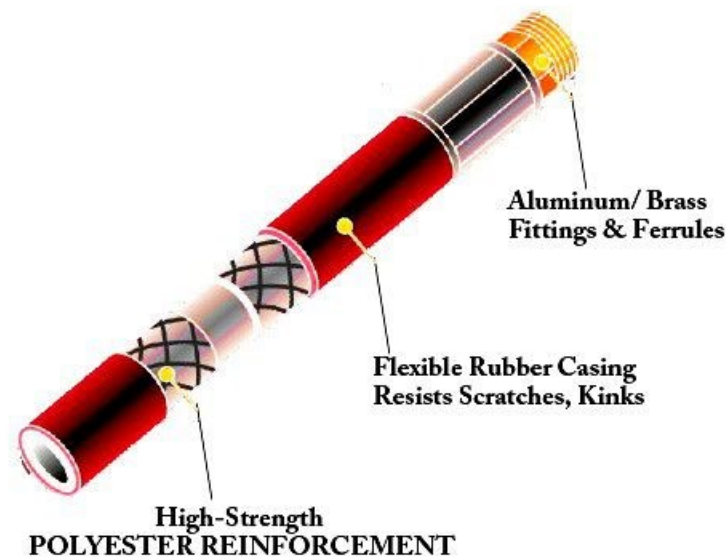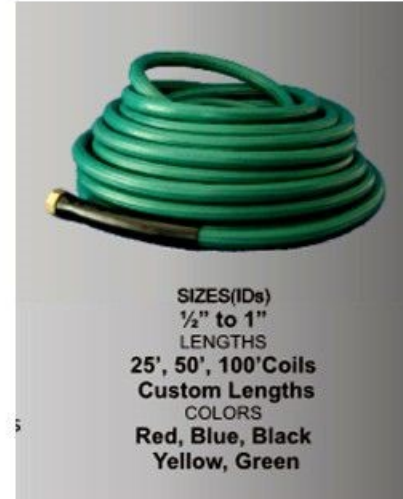

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

Premier Water/Garden Hose Diy Grade with Fitting

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
PRDWGH580025	5/8"	500	35	25'	3/4" N.H.	3 : 1	4
PRDWGH580050	5/8"	500	35	50'	3/4" N.H.	3 : 1	4
PRDWGH580100	5/8"	500	35	100'	3/4" N.H.	3 : 1	2
PRDWGH340025	3/4"	500	35	25'	3/4" N.H.	3 : 1	4
PRDWGH340050	3/4"	500	35	50'	3/4" N.H.	3 : 1	3
PRDWGH340100	3/4"	500	35	100'	3/4" N.H.	3 : 1	1

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
PRDWGH120025	1/2"	300	20	25'	3/4" N.H.	3 : 1	4
PRDWGH120050	1/2"	300	20	50'	3/4" N.H.	3 : 1	4
PRDWGH120100	1/2"	300	20	100'	3/4" N.H.	3 : 1	2
PRDWGH580025	5/8"	300	20	25'	3/4" N.H.	3 : 1	4
PRDWGH580050	5/8"	300	20	50'	3/4" N.H.	3 : 1	4
PRDWGH580100	5/8"	300	20	100'	3/4" N.H.	3 : 1	2
PRDWGH340025	3/4"	300	20	25'	3/4" N.H.	3 : 1	4
PRDWGH340050	3/4"	300	20	50'	3/4" N.H.	3 : 1	3
PRDWGH340100	3/4"	300	20	100'	3/4" N.H.	3 : 1	1

Premier Water/Garden Hose Diy Grade Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
PRDWGH12125	1/2	12.5	10.2	1	145
PRDWGH58016	5/8	16.0	10.2	1	145
PRDWGH34019	3/4	19.0	10.2	1	145
PRDWGH10025	1	25.0	10.2	1	145
PRDWGH12125	1/2	12.5	7.0	0.7	100
PRDWGH58016	5/8	16.0	7.0	0.7	100
PRDWGH34019	3/4	19.0	7.0	0.7	100
PRDWGH10025	1	25.0	7.0	0.7	100



Wrapped Water/ Garden Hose

Technical Specifications

Tube

High Strength, Versatile, Oil Mist Resistance Rubber

Cover

Smooth; Abrasion, Weather & Ozone Resistant

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass

Ferrules

Pressure

150:500PSI * (Max. Working Pressure: Min. Burst Pressure)

Oil Resistance

Exceeds RMA Class 'C' Oil Resistance

Accessories

Bend-Restrictor Sleeve to prevent damage near ends


Advantages

Heavy Duty for farm, Ranch & Industrial use, Excellent

Mechanical Properties, High Burst Strength, Handles Hot water upto 180 F

Stays Flexible in -40° F to 190° F, Lighter & more Abrasion Resistant,

Exceptional Adhesion

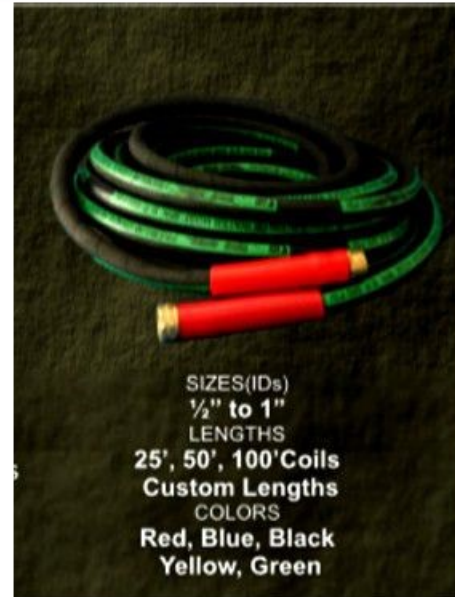

Aluminum/ Brass Fittings & Ferrules

Wrapped Finish gives more flexibility Extended Service Life & Better Adhesion

High-Strength POLYESTER REINFORCEMENT

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

Evershine Wrapped Water/Garden Hose With Fitting

PART NO.	I.D.	W.P.		LENGTH	FITTING	SAFETY RATIO W.P. : B.P.	COILS/ CARTON
		PSI	BAR				
EWVGH580025	5/8"	500	35	25'	3/4" N.H.	3 : 1	4
EWVGH580050	5/8"	500	35	50'	3/4" N.H.	3 : 1	4
EWVGH580100	5/8"	500	35	100'	3/4" N.H.	3 : 1	2
EWVGH340025	3/4"	500	35	25'	3/4" N.H.	3 : 1	4
EWVGH340050	3/4"	500	35	50'	3/4" N.H.	3 : 1	3
EWVGH340100	3/4"	500	35	100'	3/4" N.H.	3 : 1	1

Evershine Wrapped Water/Garden Hose With Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
EWVGH12125	1/2	12.5	10.2	1	145
EWVGH58016	5/8	16.0	10.2	1	145
EWVGH34019	3/4	19.0	10.2	1	145
EWVGH10025	1	25.0	10.2	1	145



Heavy Duty Welding Hose

Technical Specifications

Tube

High Strength, More Resistant to Permeation, Oil Mist Resistance Rubber

Cover

Smooth; Abrasion, Weather & Ozone Resistant EPDM Rubber

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Pressure

W.P.: 300PSI Exceeds RMA 4:1 Safety factor* (Burst Pressure To Working Pressure Ratio)

Oil Resistance


Exceeds RMA Class 'C' Oil Resistance

Accessories

Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap

Advantages

Heavy Duty for Professional use, Excellent for Oxygen/Acetylene Gas Welding, Also for Brazing and Flame Cutting Applications, Excellent for Mechanical Properties, High Burst Strength, Flexible in -40° F to 190°F

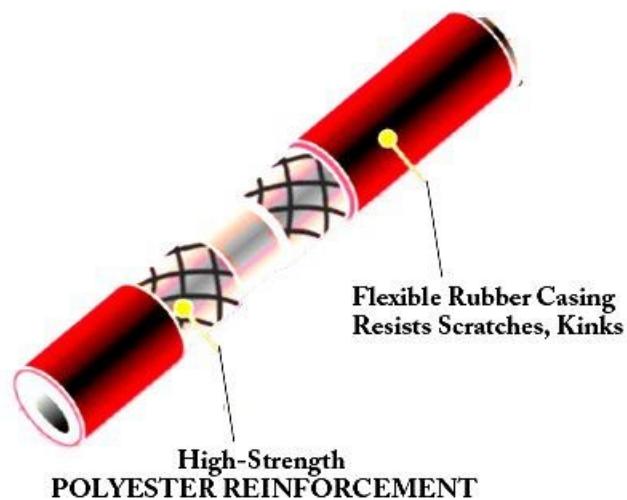

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.



Heavy Duty Twin Welding Hose

Technical Specifications

Tube

High Strength, More Resistant to Permeation, Oil Mist Resistance Rubber

Cover

Smooth; Abrasion, Weather & Ozone Resistant EPDM Rubber

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Pressure

W.P.: 300PSI Exceeds RMA 4:1 Safety factor* (Burst Pressure To Working Pressure Ratio)

Oil Resistance


Exceeds RMA Class 'C' Oil Resistance

Accessories

Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap

Advantages

Twin Hose for better efficiency, Heavy Duty for Professional use, Excellent for Oxygen/Acetylene Gas Welding, Also for Brazing and Flame Cutting Applications, Excellent for Mechanical Properties, High Burst Strength, Flexible in -40° F to 190°F

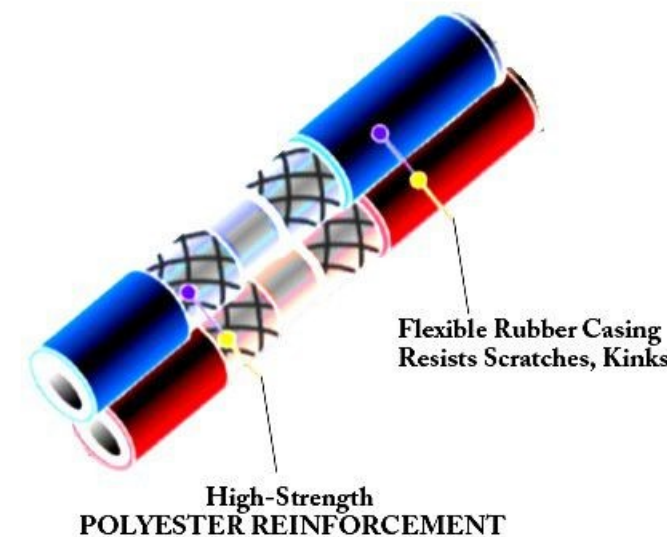

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

Evershine Professional Welding Hose Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
EWELH14006	1/4	6.3	21	2	300
EWELH51608	5/16	8.0	21	2	300
EWELH11329	11/32	9.0	21	2	300
EWELH38095	3/8	9.5	21	2	300
TWIN					
ETWELH14006	1/4	6.3	21	2	300
ETWELH51608	5/16	8.0	21	2	300
ETWELH11329	11/32	9.0	21	2	300
ETWELH38095	3/8	9.5	21	2	300

Powermax Welding Hose Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
PWELH14006	1/4	6.3	21	2	300
PWELH51608	5/16	8.0	21	2	300
PWELH11329	11/32	9.0	21	2	300
PWELH38095	3/8	9.5	21	2	300
TWIN					
PTWELH14006	1/4	6.3	21	2	300
PTWELH51608	5/16	8.0	21	2	300
PTWELH11329	11/32	9.0	21	2	300
PTWELH38095	3/8	9.5	21	2	300

POWERMAX®

Professional Grade Welding Hose

Technical Specifications

Tube

High Strength, Oil Mist Resistance Rubber

Cover

Weather & Ozone Resistant Synthetic Rubber Blend

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Pressure


W.P. :300 PSI Exceeds RMA 4:1 Safety Factor* (Burst Pressure To Working Pressure Ratio)

Oil Resistance

Exceeds EVER Class 'C' Oil Resistance

Advantages

Great for Professional use, Very Good for Oxygen/ Acetylene Gas Welding, Also for Brazing and Flame Cutting Applications, Very Good Mechanical Properties, High Burst Strength, Stays Flexible in -30° F to 190°F

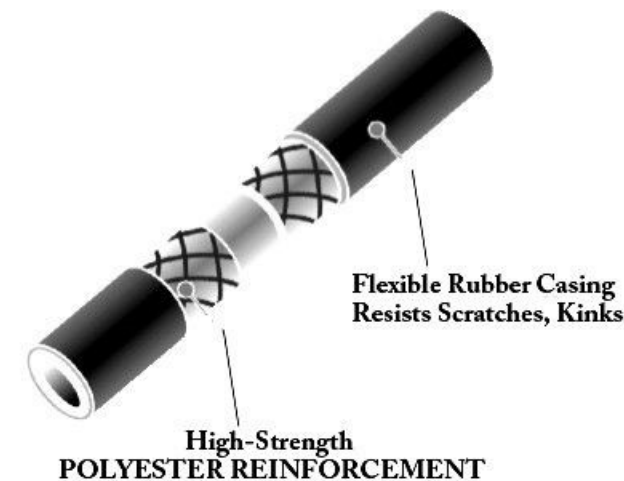

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.



Professional Grade Twin Welding Hose

Technical Specifications

Tube

High Strength, Oil Mist Resistance Rubber

Cover

Weather & Ozone Resistant Synthetic Rubber Blend

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Pressure

W.P: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)

Oil Resistance


Exceeds RMA Class 'C' Oil Resistance

Advantages

Twin Hose for better efficiency, Great for Professional use, Very Good for Oxygen/ Acetylene Gas Welding, Also for Brazing and Flame Cutting Applications, Very Good Mechanical properties, High Burst Strength, Stays Flexible in -30 ° F to 190 ° F



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

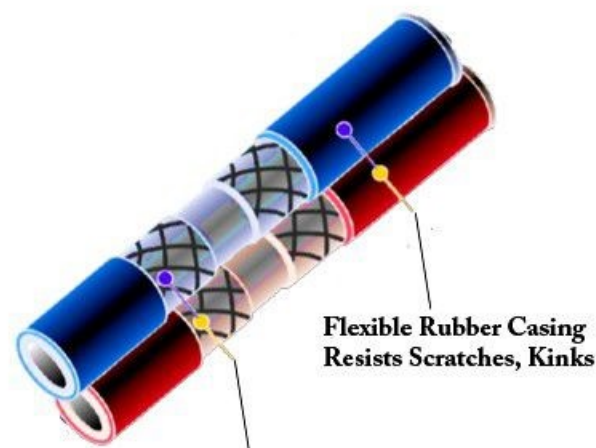

Flexible Rubber Casing
Resists Scratches, Kinks

High-Strength
POLYESTER REINFORCEMENT

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.



Commercial Grade Welding Hose

Technical Specifications

Tube

High Strength, Oil Mist Resistance Rubber

Cover

Weather & Ozone Resistant Synthetic Rubber Blend

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Pressure

W.P: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)

Oil Resistance

Exceeds RMA Class 'C' Oil Resistance

Advantages

Economical Hose for Basic Welding, Good for Oxygen/ Acetylene Gas Welding, Also for Brazing and Flame Cutting Applications, Very Good Mechanical properties, High Burst Strength



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green



Flexible Rubber Casing
Resists Scratches, Kinks

High-Strength
POLYESTER REINFORCEMENT

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

PREMIER™

Commercial Grade Welding Hose

Technical Specifications

Tube

High Strength, Oil Mist Resistance Rubber

Cover

Weather & Ozon Resistant Synthetic Rubber Blend

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Pressure



W.P: 300PSI Exceeds RMA 4:1 Safety Factor * (Bust Pressure To Working Pressure Ratio)

Oil Resistance

Exceeds RMA Class 'C' Oil Resistance

Advantages

Economical Hose or better efficiency, Also for Brazing and Dlane cutting Applications, Good Mechanical Properties, High burst Strength

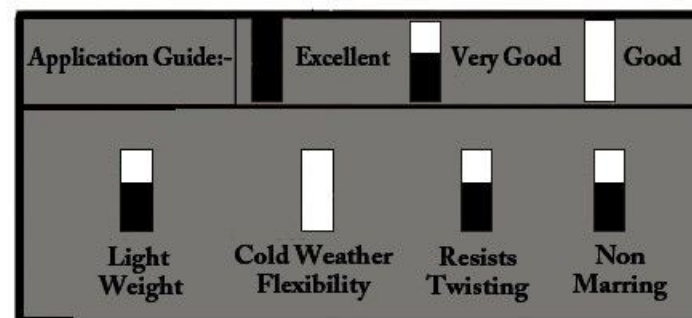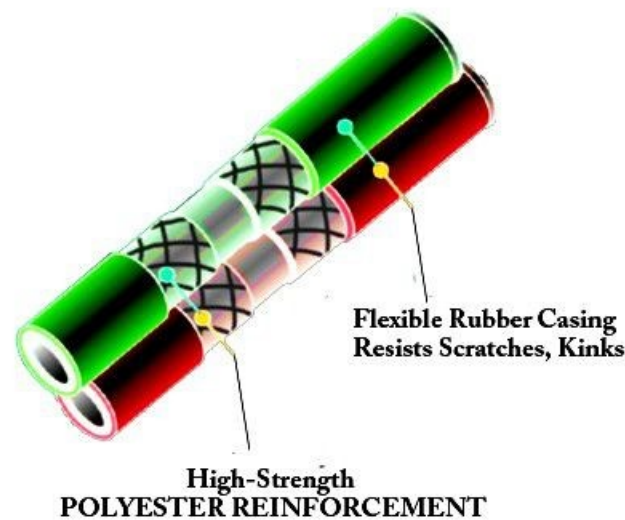

Multiple Fittings and packing options available.

Premier Commercial Grade Welding Hose Custom Length

PART NO.	I.D.		WORKING PRESSURE		
	INCH	MM	BAR	MPa	PSI
PRWELH14006	1/4	6.3	21	2	300
PRWELH51608	5/16	8.0	21	2	300
PRWELH11329	11/32	9.0	21	2	300
PRWELH38095	3/8	9.5	21	2	300
TWIN					
PRTWELH14006	1/4	6.3	21	2	300
PRTWELH51608	5/16	8.0	21	2	300
PRTWELH11329	11/32	9.0	21	2	300
PRTWELH38095	3/8	9.5	21	2	300



Wrapped Rubber Welding Hose

Technical Specifications

Tube

High Strength, Better Permeation, Oil Mist Resistance Rubber

Cover

Smooth; Abrasion, Weather & Ozone Resistant

Reinforcement

Single or Multiple Layers of High Strength Polyester Yarn

Fittings

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass

Ferrules

Pressure

W.P.: 300 PSI, Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)


Accessories

Bend-Restrictor Sleeve to prevent damage near ends

Advantages

Heavy Duty for professional use, Excellent Mechanical Properties, High Burst Strength, Wrapped Finish gives more flexibility, abrasion resistance

Lighter; Exceptional Adhesion Stays Flexible in -40° F to 190° F.

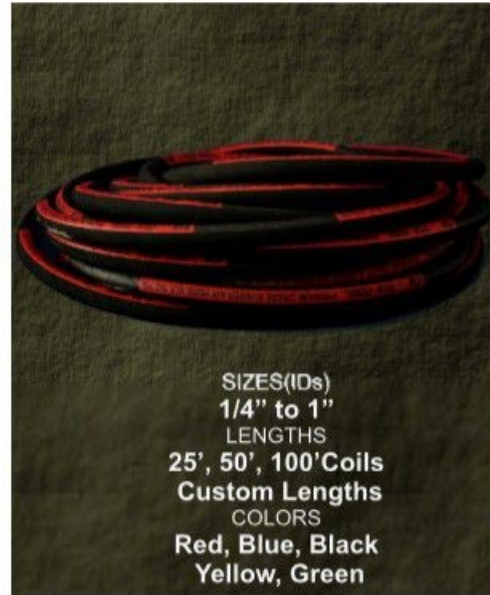

SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green



Aluminum/ Brass Fittings & Ferrules

Wrapped Finish gives more flexibility Extended Service Life & Better Adhesion

High-Strength POLYESTER REINFORCEMENT

Application Guide:-	Excellent	Very Good	Good
Light Weight	█	█	█
Cold Weather Flexibility	█	█	█
Resists Twisting	█	█	█
Non Marring	█	█	█

Multiple Fittings and packing options available.

Also Available



Air Hose Remnants

ID: 3/8"
Length: 8-15'
200, 300PSI



Air Hose Lead

ID: 3/8"
Length: 3'
200, 300PSI

Minimum Specifications equivalent to ROMO Air Hose.*


Accessories & Add-ons



Bend-Restrictor
reduces kinking



Thread Protector



Hose Extender Coupling

FITTINGS



NPT & BSP
in Brass/ Anodized Aluminum
Steel Water Hose Fittings
Other types can be arranged for larger orders

Hose Packing Options

Taco-Shell Packing



Shrink-Wrap With Lable



Garden Hose Packing



DELIVERY OPTIONS



To good business
To great quality

Thank you for your interest.

EVERSHINE RUBBERS (P) LTD.

(An ISO 9001 : 2015 COMPANY)

VPO Daburji, GT Road, Amritsar- 143006 (Punjab) India

E-mail: info@evershinehose.com
Website: www.evershinehose.com